

NT-OUTDOOR



- **Outdoor Temperature Sensing Probe**
- **Encapsulated weatherproof housing**
- **Temperature Range**
-40°F to +200°F
(-40°C to +93°C)
- **Works with NetX X-Series Thermostats**
- **Requires NT-URS (Installed Indoors)**

GENERAL DESCRIPTION:


The NT-OUTDOOR temperature sensor is designed to work in conjunction with the NT-URS sensor of the NetX X-Series thermostats. The NT-OUTDOOR is a weatherized probe mounted on a painted metal mounting flange and connected to a 6' lead. This allows the NT-URS to be mounted indoors, out of the weather.

SPECIFICATIONS:

Thermostat Sensing Range: -40°F to 200°F (-40°C to 93°C)
Control Accuracy: ±1°F @ 68°F (0.5°C @ 20°C)
Remote Sensor Terminations: Two Wire connected to NT-URS



WIRING DIAGRAMS:

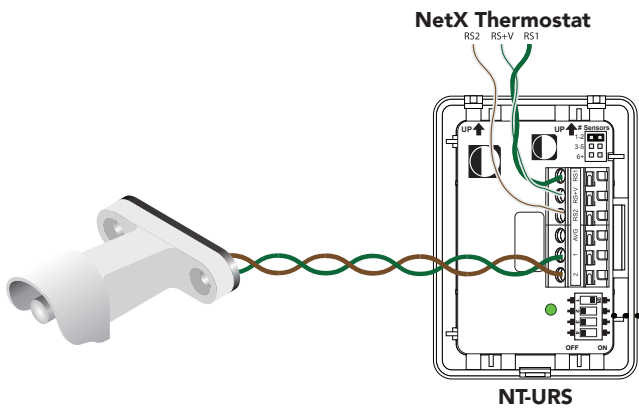

NT-URS SENSOR TYPE CONFIGURATION

<p>INDOOR Uses Internal temperature sensor or Indoor probe like the NT-FS or NT-FS-S</p>	<p>AUX 1 Uses internal temperature sensor or external probe. The external probe connects to 2-screwless terminals</p>
<p>OUTDOOR Uses outdoor probe. Has specific curve. Probe connects to 2-screwless terminals Ignores Temp/Hum Sensor</p>	<p>AUX 2 Uses internal temperature sensor or external probe. The external probe connects to 2-screwless terminals</p>
<p>INDOOR HUMIDITY ONLY Uses Internal Humidity sensor.</p>	<p>AUX 3 Uses internal temperature sensor or external probe. The external probe connects to 2-screwless terminals</p>